

BUILT TO LAST!
LEADERS IN FRAME STRENGTH

LUNAR

GLAMPING



Safari Glamping Tents

Specification Manual 2025

SAFARI TENTS

Aurora I	01
Aurora II	02
Aurora III	03
Equinox I	04
Equinox II	05
Solstice I	06
Solstice II	07
Solstice III	08
Zenith I	09
Zenith II	10
Eclipse	11
Product Dimensions	12

Embark on a journey of refined outdoor living with Luna's Safari Tent collection, tailored for the discerning glampers who crave an exquisite blend of adventure and sophistication.

The Luna Safari Tent line offers the luxurious fusion of comfort and adventure tailored for glamping enthusiasts with a taste for opulent outdoor experiences.






Safari Aurora I


Personal space with room for comfort.

A surprisingly spacious glamping experience in a modest footprint! The Aurora I's 7.5m² (81.0ft²) interior space offers accommodation for a queen-size bed as well as some of your favourite glamping essentials. Extra features like built-in sunshades, padded flooring, and customizable decor provide exceptional comfort in a variety of outdoor environments. Streamlined installation means the Aurora I assembles quickly, with little effort or technical expertise.


Leaders in frame strength and durability



Etched aluminum framework and steel connectors





Fully adjustable anti-slip buckles



Reinforcement tightening



Ratchet strap tensioners

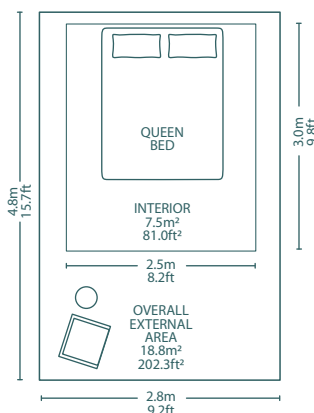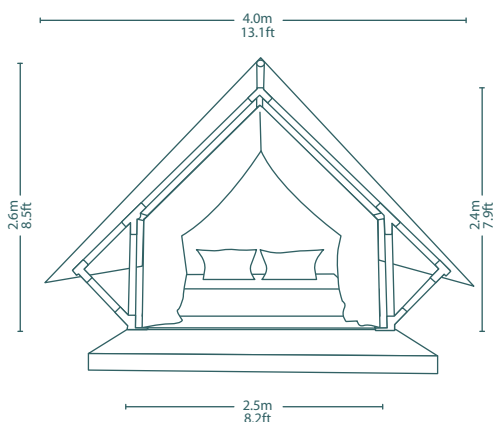

SPECIFICATIONS

Outer Dimension WxLxH	4m x 4.7m x 2.6m (13.1ft x 15.4ft x 8.5ft)
Outer Area	18.8m ² (202.4ft ²)
Platform Size WxL	2.8m x 4.8m (9.2ft x 15.7ft)
Inner Dimension WxLxH	2.5m x 3.0m x 2.4m (8.2ft x 9.8ft x 7.9ft)
Inner Area	7.5m ² (81.0ft ²)
Max Wind Load	130km/h (80mph) -to increase wind load rating please contact.
Package size WxLxH	3m x 1m x 0.4m (1.2m ³) 9.8ft x 3.3ft x 1.3ft (42.4ft ³)
Package weight	160kg (352.8lbs)

MATERIALS

Roof Fabric 650 g/m² double-coated opaque PVC (dark green), waterproof, UV resistant, flame retardant B1.

Sidewall 900D Oxford cloth with ventilation and zipper door ; PU waterproofness 5000mm; mildew-resistant; fire retardant CA117.

Insulation (optional add-on) 1 or 2 layer aluminum foil bubble insulation + canvas fabric. Radiation heat reflection coefficient 85%, waterproof, fire retardant.

Window size 0.8m x 0.6m (2.6ft x 2ft)
Windows per tent 2

Ground Lining 480 g/m² beige PVC.

Framework 6063-T6 aluminum alloy, 70mm dia, 1.5mm thickness, wood pattern.

Connector 76mm x 2mm black Q235B steel.

Netting 40gsm white.

Rope 6mm nylon ropes.

Stakes 5mm steel.



RUGGED



COZY



DURABLE



SAFE



ENGINEERED

LUNA
GLAMPING




Safari Aurora II

Luxury and durability in the rough.

The Safari Aurora II is easily set up even in the roughest environs. With its sturdy build and weather-resistant materials, the Aurora II promises resilience against harsh weather conditions. The 11.2m² (120.5ft²) interior boasts a generous layout with cozy furnishings, and well-ventilated spaces for a serene and revitalizing retreat. Utilizing eco-friendly materials such as PVC and aluminum, the Aurora line employs construction methods that minimize environmental impact while maximizing sustainability.


Leaders in frame strength and durability



Etched aluminum framework and steel connectors




Fully adjustable anti-slip buckles



Reinforcement tightening



Ratchet strap tensioners

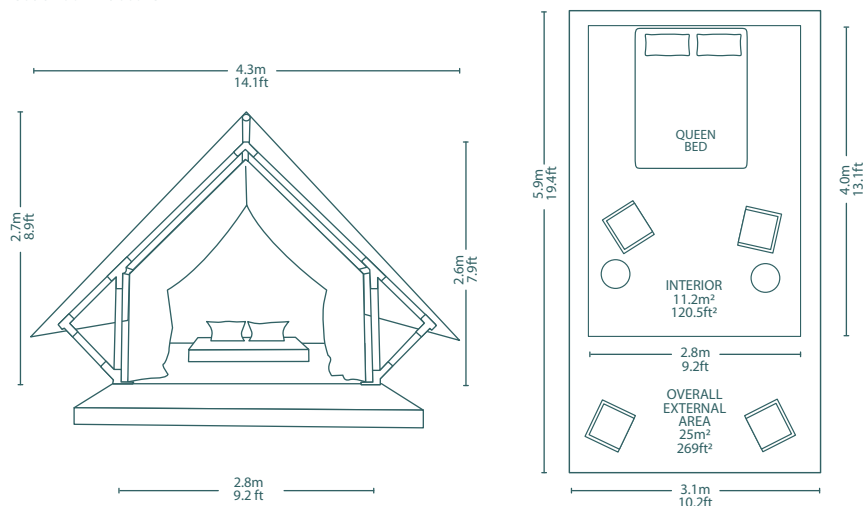

SPECIFICATIONS

Outer Dimension 4.3m x 5.8m x 2.7m
WxLxH (14.1ft x 19.0ft x 8.9ft)

Outer Area 25.0m² (270.0 ft²)

Platform Size 3.1m x 5.9m
WxL (10.2ft x 19.4ft)

Inner Dimension 2.8m x 4.0m x 2.6m
WxLxH (9.2ft x 13.1ft x 8.5ft)

Inner Area 11.2m² (120.5ft²)

Max Wind Load 130km/h (80mph)
-to increase wind load rating please contact.

Package size 4m x 1m x 0.4m (1.6m³)
WxLxH 13.1ft x 3.3ft x 1.3ft (56.5ft³)

Package weight 220kg (485lbs)

MATERIALS

Roof Fabric 650 g/m² double-coated opaque PVC (dark green), waterproof, UV resistant, flame retardant B1.

Sidewall 900D Oxford cloth with ventilation and zipper door ; PU waterproofness 5000mm; mildew-resistant; fire retardant CA117.

Insulation (optional add-on) 1 or 2 layer aluminum foil bubble insulation + canvas fabric. Radiation heat reflection coefficient 85%, waterproof, fire retardant.

Window size 0.8m x 0.6m (2.6ft x 2ft)
Windows per tent 2

Ground Lining 480 g/m² beige PVC.

Framework 6063-T6 aluminum alloy, 70mm dia, 1.5mm thickness, wood pattern.

Connector 76mm x 2mm black Q235B steel.

Netting 40gsm white.

Rope 6mm nylon ropes.

Stakes 5mm steel.



RUGGED



COZY



DURABLE



SAFE



ENGINEERED

LUNA
GLAMPING

www.lunaglamping.com 2




Safari Aurora III

Tame some space on the mountainside.

From initial design to the final construction phase, we specialize in space optimization to ensure a smooth glamping experience. Customize the Aurora III with our range of interior decor options, and elevate your experience with our thoughtfully crafted ensuite bathrooms. Experience heightened comfort and effortless setup with our lightweight flooring solutions. Embrace sustainability with our innovative solar energy solutions.


Leaders in frame strength and durability



Etched aluminum framework and steel connectors




Fully adjustable anti-slip buckles



Reinforcement tightening



Ratchet strap tensioners

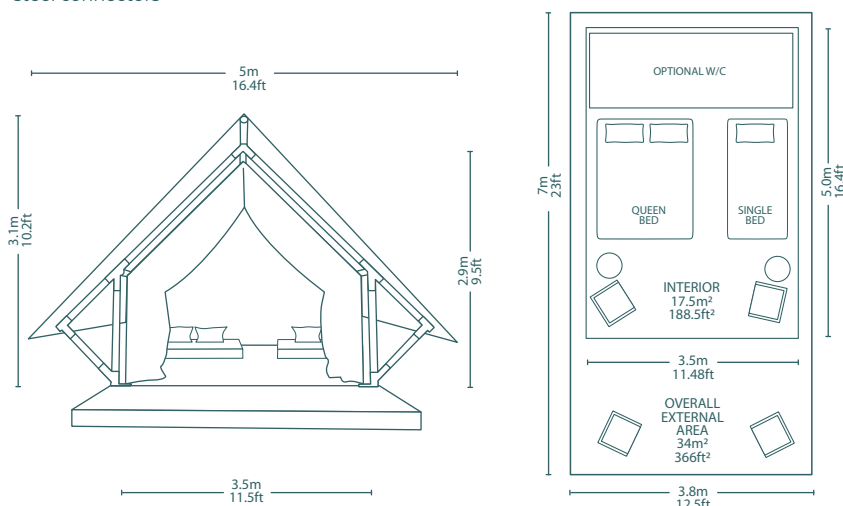

SPECIFICATIONS

Outer Dimension WxLxH	5m x 6.8m x 3.1m (16.4ft x 22.3ft x 10.2ft)
Outer Area	34.0m ² (366.0ft ²)
Platform Size WxL	3.8m x 7.0m (12.5ft x 23.0ft)
Inner Dimension WxLxH	3.5m x 5m x 2.9m (11.5ft x 16.4ft x 9.5ft)
Inner Area	17.5m ² (188.5ft ²)
Max Wind Load	130km/h (80mph) -to increase wind load rating please contact.
Package size WxLxH	4m x 1m x 0.4m (1.6m ³) 13.1ft x 3.3ft x 1.3ft (56.5ft ³)
Package weight	270kg (595lbs)

MATERIALS

Roof Fabric 650 g/m² double-coated opaque PVC (dark green), waterproof, UV resistant, flame retardant B1.

Sidewall 900D Oxford cloth with ventilation and zipper door ; PU waterproofness 5000mm; mildew-resistant; fire retardant CA117.

Insulation (optional add-on) 1 or 2 layer aluminum foil bubble insulation + canvas fabric. Radiation heat reflection coefficient 85%, waterproof, fire retardant.

Window size 0.8m x 0.6m (2.6ft x 2ft)
Windows per tent 2

Ground Lining 480 g/m² beige PVC.

Framework 6063-T6 aluminum alloy, 70mm dia, 1.5mm thickness, wood pattern.

Connector 76mm x 2mm black Q235B steel.

Netting 40gsm white.

Rope 6mm nylon ropes.

Stakes 5mm steel.



RUGGED



COZY



DURABLE



SAFE



ENGINEERED

LUNA
GLAMPING




Safari Equinox I

A versatile, compact glamping solution.

Easily transportable and simply setup, the 13.2m² (142ft²) Safari Equinox I is a great base of operations for the avid adventurer. Made from lightweight materials and engineered to be compact, the Equinox I is highly durable and weather-resistant ensuring resilience against a variety of tough weather conditions. Utilizing premium, eco-conscious materials, Luna's Equinox series endeavours to reduce environmental impact while prioritizing sustainability.


Leaders in frame strength and durability



Etched aluminum framework and steel connectors





Fully adjustable anti-slip buckles



Reinforcement tightening



Ratchet strap tensioners

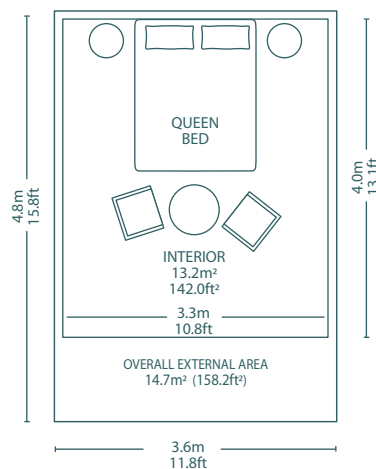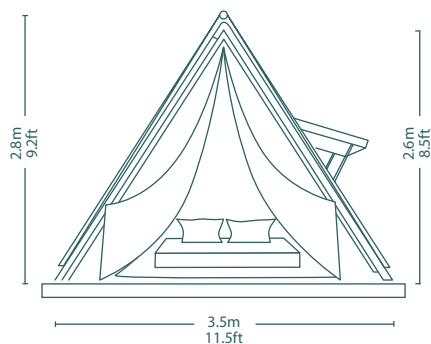

SPECIFICATIONS

Outer Dimension WxLxH	3.5m x 4.2m x 2.8m (11.5ft x 13.8ft x 9.2ft)
Outer Area	14.7m ² (158.2ft ²)
Platform Size WxL	3.6m x 4.8m (11.8ft x 15.8ft)
Inner Dimension WxLxH	3.3m x 4m x 2.6m (10.8ft x 13.1ft x 8.5ft)
Inner Area	13.2m ² (142.0ft ²)
Max Wind Load -to increase wind load rating please contact.	130km/h (80mph)
Package size WxLxH	4m x 1m x 0.5m (2m ³) 13ft x 3.3ft x 1.6ft (70.6ft ³)
Package weight	200kg (441lbs)

MATERIALS

Roof Fabric 750 g/m² double-coated opaque PVC (beige), waterproof, UV resistant, flame retardant B1.

Inner Lining 370 g/m² Canvas, including 1.2m x 0.8m window w/ mosquito net and zipper door ; waterproof, mildew-resistant; fire retardant.

Insulation (optional add-on) 1 or 2 layer aluminum foil bubble insulation + canvas fabric. Radiation heat reflection coefficient 85%, waterproof, fire retardant.

Window size 1.9m x 1.1m (6.2ft x 3.6ft)
Windows per tent 1

Ground Lining 480 g/m² beige PVC.

Framework 6063-T6 aluminum alloy, 70mm dia, 1.5mm thickness, wood pattern.

Connector 76mm x 2mm black Q235B steel.

Netting 40gsm white.

Rope 6mm nylon ropes.

Stakes 5mm steel.



RUGGED



COZY



DURABLE



SAFE



ENGINEERED

LUNA
GLAMPING




Safari Equinox II

True harmony of size and utility.

Crafted from superior, weather-resistant aluminum and fabric, The Safari Equinox II can withstand winds exceeding 130 kilometers per hour. Its modular design facilitates effortless repairs and part replacements which ultimately translates into better value and a longer lasting, more robust product lifespan of 3-5 years—twice the longevity of the typical tent. Furthermore, customizable amenities such as built-in sunshades and cushioned flooring promise comfort across diverse outdoor settings.

Leaders in frame strength and durability



Etched aluminum framework and steel connectors





Fully adjustable anti-slip buckles



Automobile-grade baking metal finish



Ratchet strap tensioners

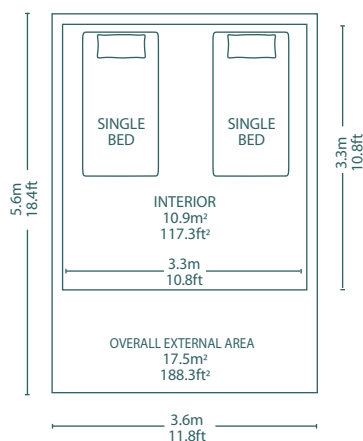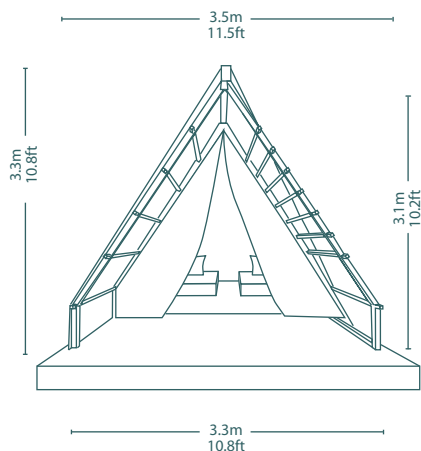

SPECIFICATIONS

Outer Dimension WxLxH	3.5m x 5.0m x 3.3m (11.5ft x 16.4ft x 10.8ft)
Outer Area	17.5m ² (188.3ft ²)
Platform Size WxL	3.6m x 5.6m (11.8ft x 18.4ft)
Inner Dimension WxLxH	3.3m x 3.3m x 3.1m (10.8ft x 10.8ft x 10.2ft)
Inner Area	10.9m ² (117.3ft ²)
Max Wind Load	130km/h (80mph) -to increase wind load rating please contact.
Package size WxLxH	4m x 1m x 0.6m (2.4m ³) 13ft x 3.3ft x 2ft (85.0ft ³)
Package weight	250kg (551lbs)

MATERIALS

Roof Fabric 750 g/m² double-coated opaque PVC (beige), waterproof, UV resistant, flame retardant B1.

Inner Lining 370 g/m² Canvas, including 1.2m x 0.8m window w/ mosquito net and zipper door ; waterproof; mildew-resistant; fire retardant.

Insulation (optional add-on) 1 or 2 layer aluminum foil bubble insulation + canvas fabric. Radiation heat reflection coefficient 85%, waterproof, fire retardant.

Window size 1.17m x 0.8m (3.8ft x 2.6ft)
Windows per tent 1 Rear

Ground Lining 480 g/m² beige PVC.

Framework 6063-T6 aluminum alloy, 70mm dia, 1.5mm thickness, wood pattern.

Connector 76mm x 2mm black Q235B steel.

Netting 40gsm white.

Rope 6mm nylon ropes.

Stakes 5mm steel.



RUGGED



COZY



DURABLE



SAFE



ENGINEERED

LUNA
GLAMPING




Safari Solstice I


A unique footprint in the sand.

The frame of the Safari Solstice I is constructed with aeronautical-grade 6063-T6 aluminum alloy giving it a solid structure that can withstand winds of up to 130 km/h, driving snow, or hammering rain. The overall life cycle can reach 3-5 years with 1 year warranty. Safari Solstice I can be rapidly deployed and provides exceptional comfort to campers and glampers in a variety of outdoor environments with its roomy inner tent, padded flooring, and available interior decor.


Leaders in frame strength and durability



Etched aluminum framework and steel connectors




Fully adjustable anti-slip buckles



Reinforcement tightening



Ratchet strap tensioners

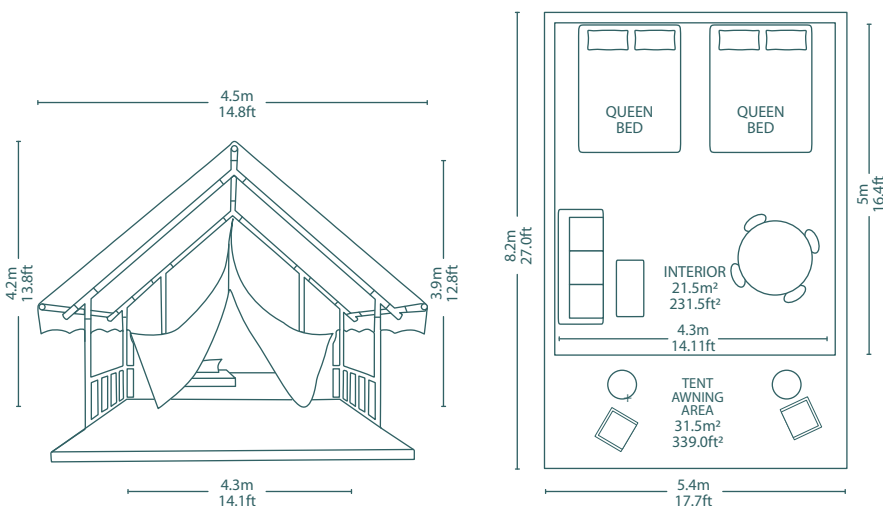

SPECIFICATIONS

Outer Dimension WxLxH	4.5m x 7.0m x 4.2m (14.8ft x 23.0ft x 13.8ft)
Outer Area	31.5m² (339.0ft²)
Platform Size WxL	5.4m x 8.2m (17.7ft x 27.0ft)
Inner Dimension WxLxH	4.3m x 5m x 3.9m (14.1ft x 16.4ft x 12.8ft)
Inner Area	21.5m² (231.5ft²)
Max Wind Load	130km/h (80mph) -to increase wind load rating please contact.
Package size WxLxH	5m x 1m x 0.6m (2.1m³) 16.4ft x 3.3ft x 2ft (74.1ft³)
Package weight	400kg (882.0lbs)

MATERIALS

Roof Fabric 750 g/m² double-coated opaque PVC (beige), waterproof, UV resistant, flame retardant B1.

Sidewall 370 g/m² Canvas, including 1.2m x 0.8m window w/ mosquito net and zipper door. Waterproof; mildew-resistant; fire retardant.

Insulation (optional add-on) 1 or 2 layer aluminum foil bubble insulation + canvas fabric. Radiation heat reflection coefficient 85%, waterproof, fire retardant.

Window size 1.2m x 0.8m (3.9ft x 2.6ft)
Windows per tent 4

Ground Lining 480 g/m² beige PVC.

Framework 6063-T6 aluminum alloy, 90mm dia, 1.8mm thickness, wood pattern.

Connector 95mm x 1.5mm black Q235B steel.

Netting 40gsm white.

Rope 6mm nylon ropes.

Stakes 5mm steel.



RUGGED



COZY



DURABLE



SAFE



ENGINEERED

LUNA
GLAMPING




Safari Solstice II

The hills are alive with glamping luxury.

When you set your sights high, your glamping experiences can also soar. All your glamping adventures can be realized with the spacious 23.7m² (255.1ft²) Solstice II. Immersed in nature yet cocooned in safety and maximum comfort, the Solstice II transforms wilderness spaces into wonderfully livable spaces. Made from lightweight aluminum and engineered for ease of assembly, the Solstice II seamlessly blends seclusion with breathtaking scenery.


Leaders in frame strength and durability



Etched aluminum framework and steel connectors





Fully adjustable anti-slip buckles



Reinforcement tightening



Ratchet strap tensioners

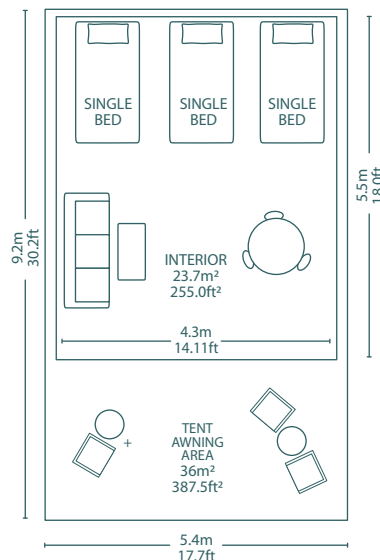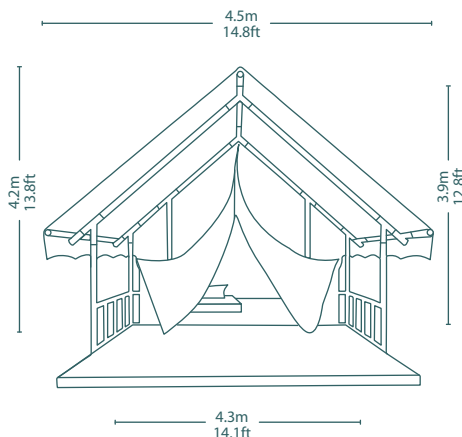

SPECIFICATIONS

Outer Dimension WxLxH	4.5m x 8.0m x 4.2m (14.8ft x 26.2ft x 13.8ft)
Outer Area	36m ² (387.5ft ²)
Platform Size WxL	5.4m x 9.2m (17.7ft x 30.2ft)
Inner Dimension WxLxH	4.3m x 5.5m x 3.9m (14.1ft x 18.0ft x 12.8ft)
Inner Area	23.7m ² (255.1ft ²)
Max Wind Load	130km/h (80mph) -to increase wind load rating please contact.
Package size WxLxH	5m x 1m x 0.6m (2.1m ³) 16.4ft x 3.3ft x 2ft (74.1ft ³)
Package weight	400kg (882.0lbs)

MATERIALS

Roof Fabric 750 g/m² double-coated opaque PVC (beige), waterproof, UV resistant, flame retardant B1.

Sidewall 370 g/m² Canvas, including 1.2m x 0.8m window w/ mosquito net and zipper door. Waterproof; mildew-resistant; fire retardant.

Insulation (optional add-on) 1 or 2 layer aluminum foil bubble insulation + canvas fabric. Radiation heat reflection coefficient 85%, waterproof, fire retardant.

Window size 1.2m x 0.8m (3.9ft x 2.6ft)
Windows per tent 4

Ground Lining 480 g/m² beige PVC.

Framework 6063-T6 aluminum alloy, 990mm dia, 1.8mm thickness, wood pattern.

Connector: 95mm x 1.5mm black Q235B steel.

Netting 40gsm white.

Rope 6mm nylon ropes.

Stakes 5mm steel.



RUGGED



COZY



DURABLE



SAFE



ENGINEERED

LUNA
GLAMPING

www.lunaglamping.com 7



Safari Solstice III


Glamping plans aren't set in stone.

Luna Safari tents are adaptable to different locations, from lush forests to sandy beaches and rugged mountains. The interior of the Solstice III can be customized to enhance comfort and luxury. From plush bedding and stylish furnishings to modern amenities such as heating, air conditioning, solar power, and even ensuite bathrooms, the Solstice III offers a high level of comfort comparable to that of a traditional cabin.


Leaders in frame strength and durability



Etched aluminum framework and steel connectors




Fully adjustable anti-slip buckles



Reinforcement tightening



Ratchet strap tensioners

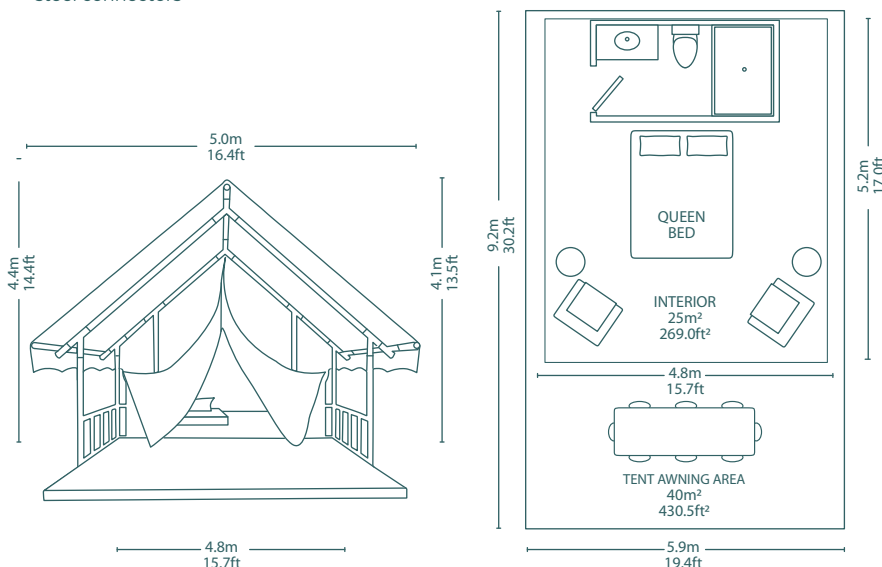

SPECIFICATIONS

Outer Dimension WxLxH	5.0m x 8.0m x 4.4m (16.4ft x 26.2ft x 14.4ft)
Outer Area	40m² (430.5ft²)
Platform Size WxL	5.9m x 9.2m (19.4ft x 30.2ft)
Inner Dimension WxLxH	4.8m x 5.2m x 4.1m (15.7ft x 17.0ft x 13.5ft)
Inner Area:	25.0m² (269.0ft²)
Max Wind Load	130km/h (80mph) -to increase wind load rating please contact.
Package size WxLxH	8m x 1m x 0.6m (2.28m³) 26.3ft x 3.3ft x 2ft (80.5ft³)
Package weight	450kg (992.0lbs)

MATERIALS

Roof Fabric 750 g/m² double-coated opaque PVC (beige), waterproof, UV resistant, flame retardant B1.

Sidewall 370 g/m² Canvas, including 1.2m x 0.8m window w/ mosquito net and zipper door. Waterproof; mildew-resistant; fire retardant.

Insulation (optional add-on) 1 or 2 layer aluminum foil bubble insulation + canvas fabric. Radiation heat reflection coefficient 85%, waterproof, fire retardant.

Window size 1.2m x 0.8m (3.9ft x 2.6ft)
Windows per tent 4

Ground Lining 480 g/m² beige PVC.

Framework 6063-T6 aluminum alloy, 90mm dia, 1.8mm thickness, wood pattern.

Connector 95mm x 1.5mm black Q235B steel.

Netting 40gsm white.

Rope 6mm nylon ropes.

Stakes 5mm steel.



RUGGED



COZY



DURABLE



SAFE



ENGINEERED

LUNA
GLAMPING

www.lunaglamping.com 8




Safari Zenith I

Caste away your pre-conceptions.

Relaxing in the Zenith I's spacious 25m² (269.1 ft²) interior is very far from traditional camping. With room for a family and plenty of their favourite glamping gear, the Zenith I brings glamping comfort and luxury to a new level. Extra features like built-in sunshades, padded flooring, and customizable decor provide exceptional comfort in a variety of outdoor environments. Streamlined installation means that the Zenith I assembles with minimum effort or technical expertise.


Leaders in frame strength and durability



Etched aluminum framework and steel connectors




Reinforced steel frame footings



Fully adjustable anti-slip buckles



Dual layers create insulating air-gap

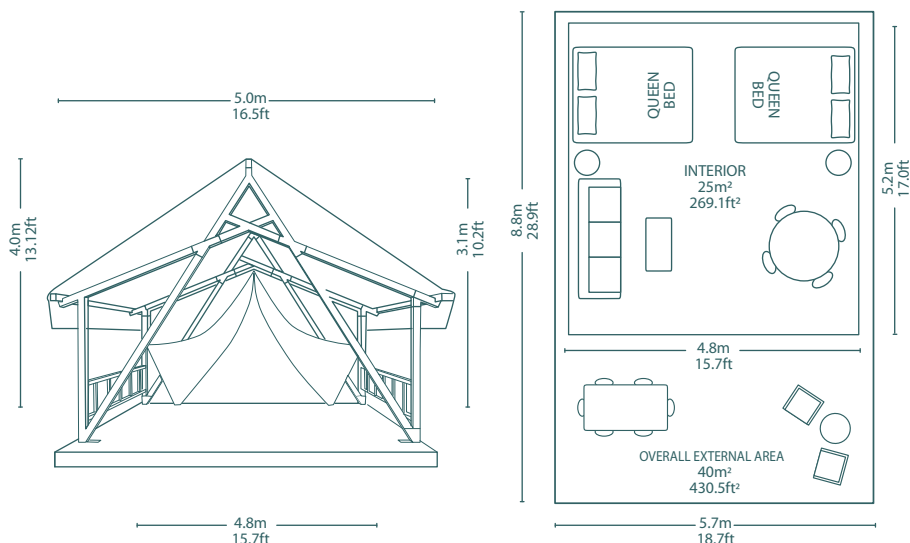

SPECIFICATIONS

Outer Dimension WxLxH	5.0m x 8.0m x 4.0m (16.4ft x 26.2ft x 13.1ft)
Outer Area	40m ² (430.5ft ²)
Platform Size WxL	5.7m x 8.8m (18.7ft x 28.9ft)
Inner Dimension WxLxH	4.8m x 5.2m x 3.1m (15.7ft x 17.0ft x 10.2ft)
Inner Area	25.0m ² (269.1ft ²)
Max Wind Load	130km/h (80mph) -to increase wind load rating please contact.
Package size WxLxH	5m x 1.2m x 0.6m (3.6m ³) 16.4ft x 4.0ft x 2ft (118.5ft ³)
Package weight	450kg (992.0lbs)

MATERIALS

Roof Fabric 750 g/m² double-coated opaque PVC (beige), waterproof, UV resistant, flame retardant B1.

Inner Lining 370 g/m² Canvas, including window w/ mosquito net and zipper door. Waterproof; mildew-resistant; fire retardant.

Insulation (optional add-on) 1 or 2 layer aluminum foil bubble insulation + canvas fabric. Radiation heat reflection coefficient 85%, waterproof, fire retardant.

Window size 1.2m x 0.8m (3.9ft x 2.6ft)
Windows per tent 4

Ground Lining 480 g/m² beige PVC.

Framework 6063-T6 aluminum alloy, 80mm x 100mm x 1.5mm rectangular profiles, wood pattern.

Connector black Q235B steel.

Netting 40gsm white.

Rope 6mm nylon ropes.

Stakes 5mm steel.



RUGGED



COZY



DURABLE



SAFE



ENGINEERED

LUNA
GLAMPING



Safari Zenith II


A beautiful view from inside and out.

Sliding the Zenith II's large tempered glass doors open will immediately give you a different perspective on glamping. At once you are immersed in the essence of your environment. But you may never want to leave the spacious luxury of the 25m² (269.1ft²) interior space. The Safari Zenith II offers a variety of customizable options such as heating, air conditioning, solar power, and even ensuite bathrooms that can bring great possibilities to your glamping experience.


Leaders in frame strength and durability




Etched aluminum framework and steel connectors




Key lock



Fully adjustable anti-slip buckles



Sliding glass doors

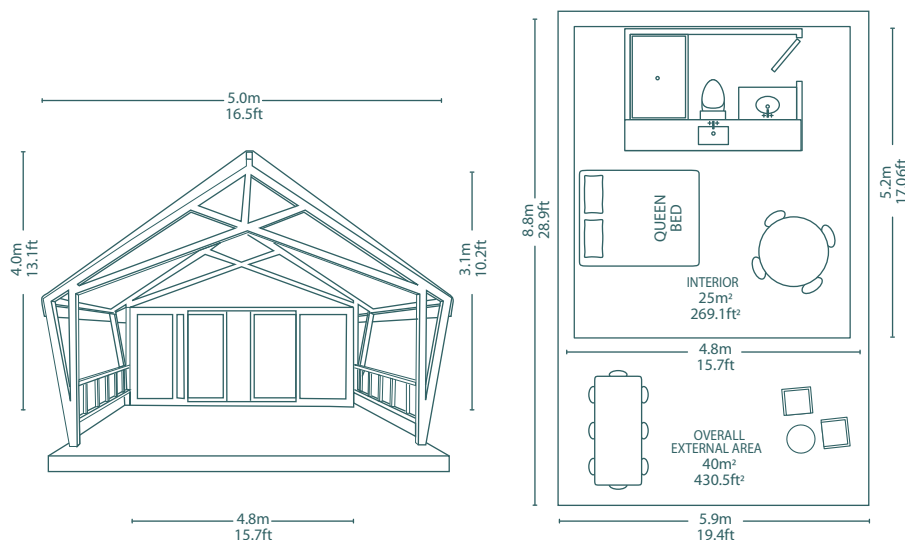

SPECIFICATIONS

Outer Dimension 5.0m x 8.0m x 4.0m
WxLxH (16.4ft x 26.2ft x 13.1ft)

Outer Area 40m² (430.5ft²)

Platform Size 5.9m x 8.8m
WxL (19.4ft x 28.9ft)

Inner Dimension 4.8m x 5.2m x 3.1m
WxLxH (15.7ft x 17.0ft x 10.2ft)

Inner Area 25.0m² (267.0ft²)

Max Wind Load 130km/h (80mph)
-to increase wind load rating please contact.

Package size (1) 4m x 1.35m x 0.6m (3.24m³)
13.1ft x 4.5ft x 2ft (114.5ft³)

WxLxH (2) 2.5m x 1.0m x 1.0m (2.5m³)
8.2ft x 3.3ft x 3.3ft (88.2ft³)

Package weight 800kg (1764.0lbs)

MATERIALS

Roof Fabric 750 g/m² double-coated opaque PVC (beige), waterproof, UV resistant, flame retardant B1.

Inner Lining 370 g/m² Canvas, including 1.2m x 0.8m window w/ mosquito net; waterproof; mildew-resistant; fire retardant.

Entrance Four sliding glass doors with 5 x 9A x 5 tempered glass measuring 4880mm x 2100mm with black aluminum alloy frame. Key lock included.

Insulation (optional add-on) 1 or 2 layer aluminum foil bubble insulation + canvas fabric. Radiation heat reflection coefficient 85%, waterproof, fire retardant.

Window size 1.2m x 0.8m (3.9ft x 2.6ft)
Windows per tent 4

Ground Lining 480 g/m² beige PVC.

Framework 6063-T6 aluminum alloy, 80mm x 100mm x 1.5mm rectangular profiles, wood pattern.

Connector black Q235B steel.

Netting 40gsm white.

Rope 6mm nylon ropes.

Stakes 5mm steel.



RUGGED



COZY



DURABLE



SAFE



ENGINEERED

LUNA
GLAMPING




Safari Eclipse


Glamping comfort with room to spare.

Our largest safari tent configuration, the Luna Safari Eclipse boasts a very comfortable 46.2m² (497.0ft²) interior space and offers ample accommodation for families or groups. The premium sliding glass door feature not only creates a great view, but also a sense of permanence. And as well as comfortable, luxurious glamping adventures, the Safari Eclipse would also make a wonderful and versatile semi-permanent addition to a backyard or holiday property.


Leaders in frame strength and durability




Etched aluminum framework and steel connectors




Fully adjustable anti-slip buckles



Sliding glass doors



Key Lock

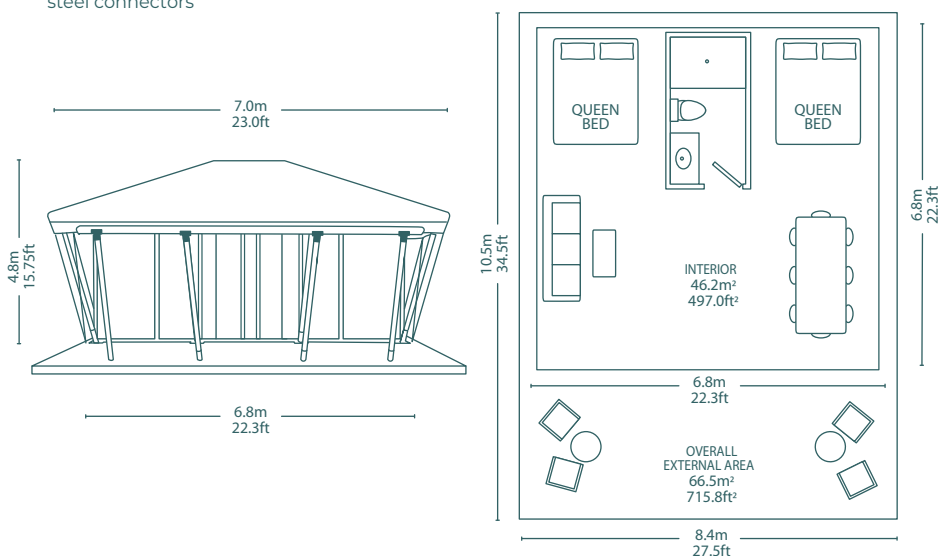

SPECIFICATIONS

Outer Dimension WxLxH	7.0m x 9.5m x 4.8m (23.0ft x 31.1ft x 15.7ft)
Outer Area	66.5m ² (715.8ft ²)
Platform Size WxL	8.4m x 10.5m (27.5ft x 34.5ft)
Inner Dimension WxLxH	6.8m x 6.8m x 4.3m (22.3ft x 22.3ft x 14.1ft)
Inner Area	46.2m ² (497.0ft ²)
Max Wind Load	130km/h (80mph) -to increase wind load rating please contact.
Package size	(1) 6.7m x 1.1m x 1.0m (7.4m ³) 22.0ft x 3.6ft x 3.3ft (260.3ft ³) WxLxH (2) 2.5m x 1.0m x 1.3m (3.3m ³) 8.2ft x 3.3ft x 4.3ft (114.8ft ³)
Package weight:	1200kg (2645.5lbs)

MATERIALS

Roof Fabric 750 g/m² double-coated opaque PVC (beige), waterproof, UV resistant, flame retardant B1.

Inner Lining 370 g/m² Canvas, including 1.2m x 0.8m window w/ mosquito net; waterproof; mildew-resistant; fire retardant.

Entrance Six sliding glass doors with 5 x 9A x 5 tempered glass measuring 6990mm x 2400mm with black aluminum alloy frame. Key lock included.

Insulation (optional add-on) 1 or 2 layer aluminum foil bubble insulation + canvas fabric. Radiation heat reflection coefficient 85%, waterproof, fire retardant.

Window size 1.2m x 0.8m (3.9ft x 2.6ft)
1.3m x 1.2m (4.3ft x 3.9ft)

Windows per tent 2 + 2

Ground Lining 480 g/m² beige PVC.

Framework 6063-T6 aluminum alloy, 90mm dia, 1.8mm thickness, wood pattern.

Connector 95mm x 1.5mm black Q235B steel.

Netting 40gsm white.

Rope 6mm nylon ropes.


Stakes 5mm steel.




LUNA
GLAMPING

Safari Tents - Product Dimensions


AURORA I




AURORA II




AURORA III




EQUINOX I




EQUINOX II




SOLSTICE I




SOLSTICE II

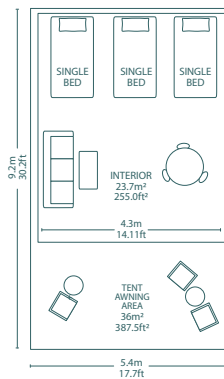


SOLSTICE III

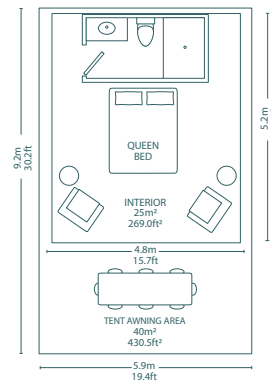

ZENITH I

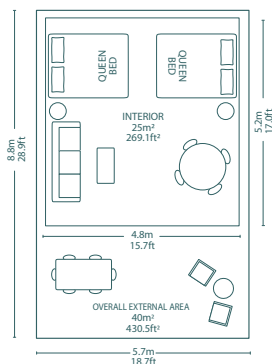

ZENITH II

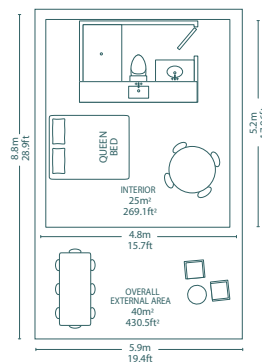

ECLIPSE

