




Safari Aurora III

Tame some space on the mountainside.

From initial design to the final construction phase, we specialize in space optimization to ensure a smooth glamping experience. Customize the Aurora III with our range of interior decor options, and elevate your experience with our thoughtfully crafted ensuite bathrooms. Experience heightened comfort and effortless setup with our lightweight flooring solutions. Embrace sustainability with our innovative solar energy solutions.


Leaders in frame strength and durability



Etched aluminum framework and steel connectors




Fully adjustable anti-slip buckles



Reinforcement tightening



Ratchet strap tensioners

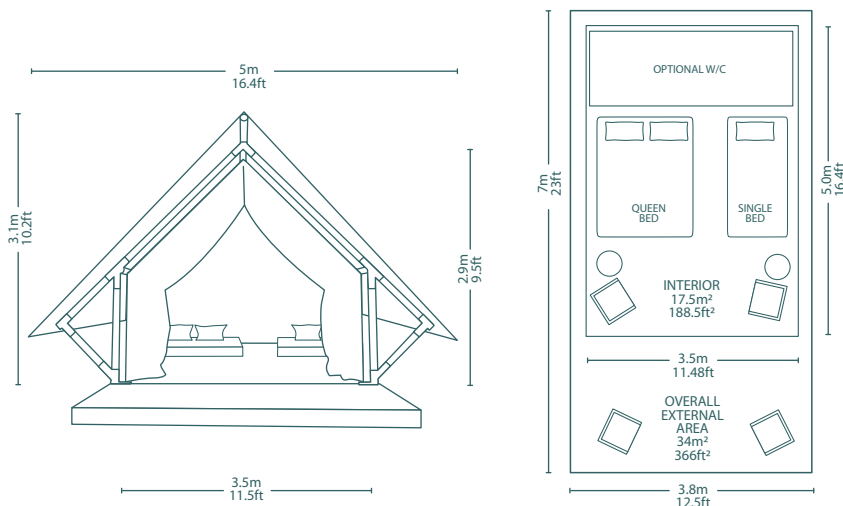

SPECIFICATIONS

Outer Dimension WxLxH	5m x 6.8m x 3.1m (16.4ft x 22.3ft x 10.2ft)
Outer Area	34.0m ² (366.0ft ²)
Platform Size WxL	3.8m x 7.0m (12.5ft x 23.0ft)
Inner Dimension WxLxH	3.5m x 5m x 2.9m (11.5ft x 16.4ft x 9.5ft)
Inner Area	17.5m ² (188.5ft ²)
Max Wind Load	130km/h (80mph) -to increase wind load rating please contact.
Package size WxLxH	4m x 1m x 0.4m (1.6m ³) 13.1ft x 3.3ft x 1.3ft (56.5ft ³)
Package weight	270kg (595lbs)

MATERIALS

Roof Fabric 650 g/m² double-coated opaque PVC (dark green), waterproof, UV resistant, flame retardant B1.

Sidewall 900D Oxford cloth with ventilation and zipper door ; PU waterproofness 5000mm; mildew-resistant; fire retardant CA117.

Insulation (optional add-on) 1 or 2 layer aluminum foil bubble insulation + canvas fabric. Radiation heat reflection coefficient 85%, waterproof, fire retardant.

Window size 0.8m x 0.6m (2.6ft x 2ft)
Windows per tent 2

Ground Lining 480 g/m² beige PVC.

Framework 6063-T6 aluminum alloy, 70mm dia, 1.5mm thickness, wood pattern.

Connector 76mm x 2mm black Q235B steel.

Netting 40gsm white.

Rope 6mm nylon ropes.

Stakes 5mm steel.



RUGGED



COZY



DURABLE



SAFE



ENGINEERED

LUNA
GLAMPING