



Safari Zenith I

Caste away your pre-conceptions.

Relaxing in the Zenith I's spacious 25m² (269.1 ft²) interior is very far from traditional camping. With room for a family and plenty of their favourite glamping gear, the Zenith I brings glamping comfort and luxury to a new level. Extra features like built-in sunshades, padded flooring, and customizable decor provide exceptional comfort in a variety of outdoor environments. Streamlined installation means that the Zenith I assembles with minimum effort or technical expertise.

Leaders in frame strength and durability



Etched aluminum framework and steel connectors




Reinforced steel frame footings



Fully adjustable anti-slip buckles



Dual layers create insulating air-gap

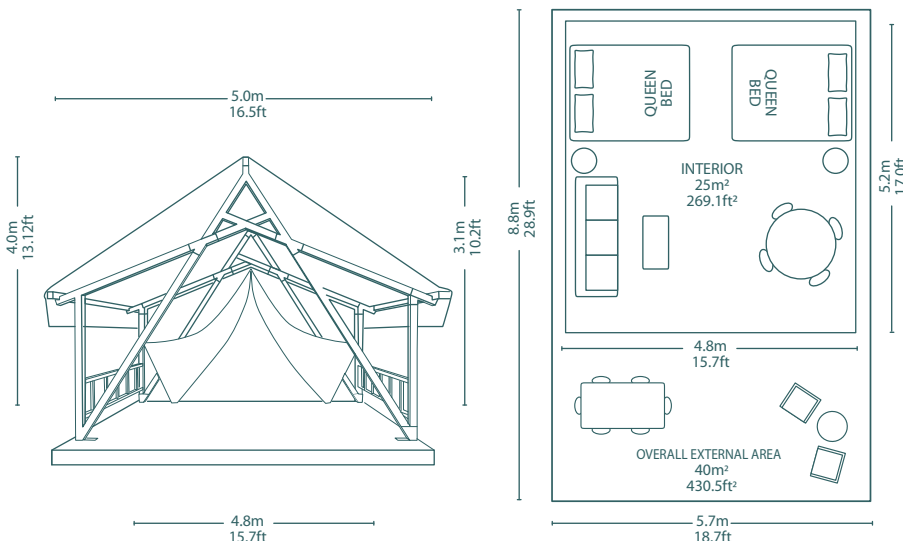

SPECIFICATIONS

Outer Dimension WxLxH	5.0m x 8.0m x 4.0m (16.4ft x 26.2ft x 13.1ft)
Outer Area	40m ² (430.5ft ²)
Platform Size WxL	5.7m x 8.8m (18.7ft x 28.9ft)
Inner Dimension WxLxH	4.8m x 5.2m x 3.1m (15.7ft x 17.0ft x 10.2ft)
Inner Area	25.0m ² (269.1ft ²)
Max Wind Load	130km/h (80mph) -to increase wind load rating please contact.
Package size WxLxH	5m x 1.2m x 0.6m (3.6m ³) 16.4ft x 4.0ft x 2ft (118.5ft ³)
Package weight	450kg (992.0lbs)

MATERIALS

Roof Fabric 750 g/m² double-coated opaque PVC (beige), waterproof, UV resistant, flame retardant B1.

Inner Lining 370 g/m² Canvas, including window w/ mosquito net and zipper door. Waterproof; mildew-resistant; fire retardant.

Insulation (optional add-on) 1 or 2 layer aluminum foil bubble insulation + canvas fabric. Radiation heat reflection coefficient 85%, waterproof, fire retardant.

Window size 1.2m x 0.8m (3.9ft x 2.6ft)
Windows per tent 4

Ground Lining 480 g/m² beige PVC.

Framework 6063-T6 aluminum alloy, 80mm x 100mm x 1.5mm rectangular profiles, wood pattern.

Connector black Q235B steel.

Netting 40gsm white.

Rope 6mm nylon ropes.

Stakes 5mm steel.



RUGGED



COZY



DURABLE



SAFE



ENGINEERED

LUNA
GLAMPING